



PRODUCT DIMENSIONS


SIDE VIEW

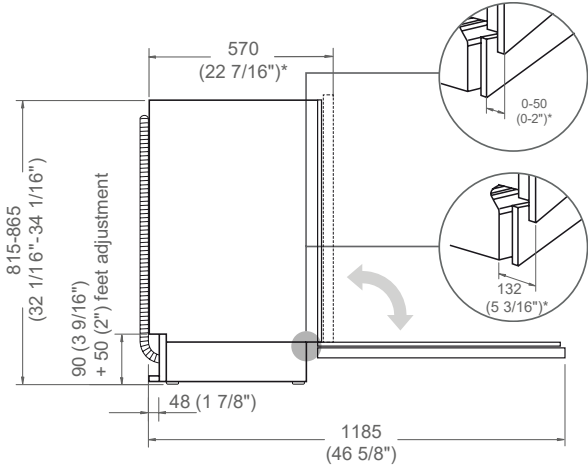

FRONT VIEW

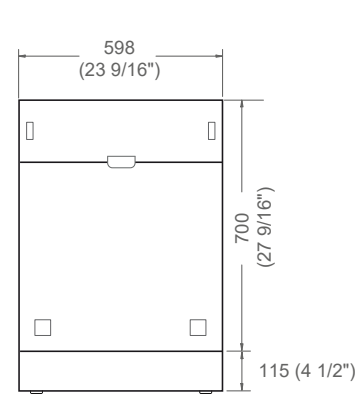

TOP VIEW




Drain hose is provided with the unit.


* Including a 20 (13/16") thick kitchen cabinet front panel. A minimum space of 3 (1/8") is required between the plinth and the panel.

CUTOUT DIMENSIONS


SIDE VIEW



FRONT VIEW

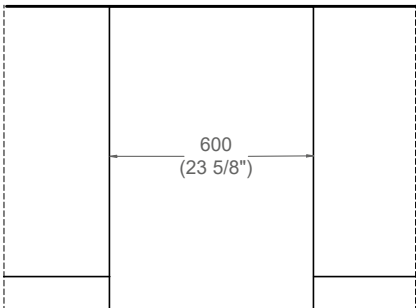

TOP VIEW

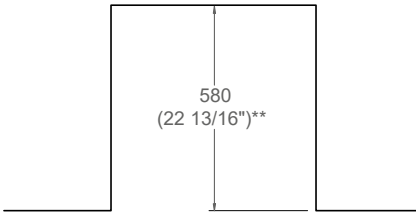

**Cabinet depth shown includes a 20 (13/16") thick kitchen cabinet front panel.


ELECTRICAL & WATER CONNECTION

- E


A properly-grounded, horizontally-mounted electrical receptacle should be installed according to this drawing.
- W

To connect the water mains to the water inlet valve thread, use the 3/4" threaded connector and 1500 (59 1/16") water inlet hose (supplied).

TOP VIEW

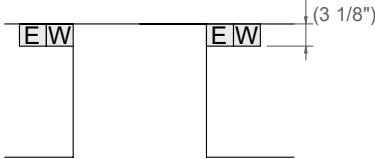

FRONT VIEW




Connections placement must be located on either side of the cutout.

INSTALLATION REQUIREMENTS

Follow local codes & ordinances for drain requirements. Install a 300-1000 (11 13/16" - 39 3/8") high drain loop to prevent backflow. Drain hose is 1800 (70 7/8") long. Items will not wash properly if an extension drain hose longer than 4 m (157 1/2") is used.

CUSTOM PANEL & BASEBOARD

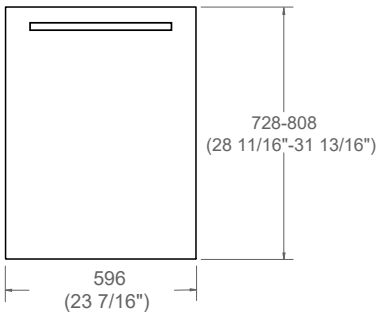

Custom panel weight must be within the range of 5 kg (11 lb) and 11 kg (24 lb). Suggested panel thickness is 20 (13/16"). The height of a custom plinth must be within the range of 0-80 (0-3 1/8"). Max height can be increased by an additional 50 (2") if feet are raised. Panel width can be increased up to 750 (29 1/2") if needed.

Dimensions are in millimeters unless otherwise specified.